


Manufacturer of Concrete Batching, Mining, & Quarrying, Blending & Asphalt Equipment



Typical air classifier arrangement

- » Removes fine particles from crusher dust / manufactured sand.
- » 100 tonnes per hour.
- » Minimum moving components therefore less expensive to operate and maintain.
- » The louvers and internal walls are rubber lined.
- » The volume and particle size of the extracted fine dust is controlled by regulating the fan speed.

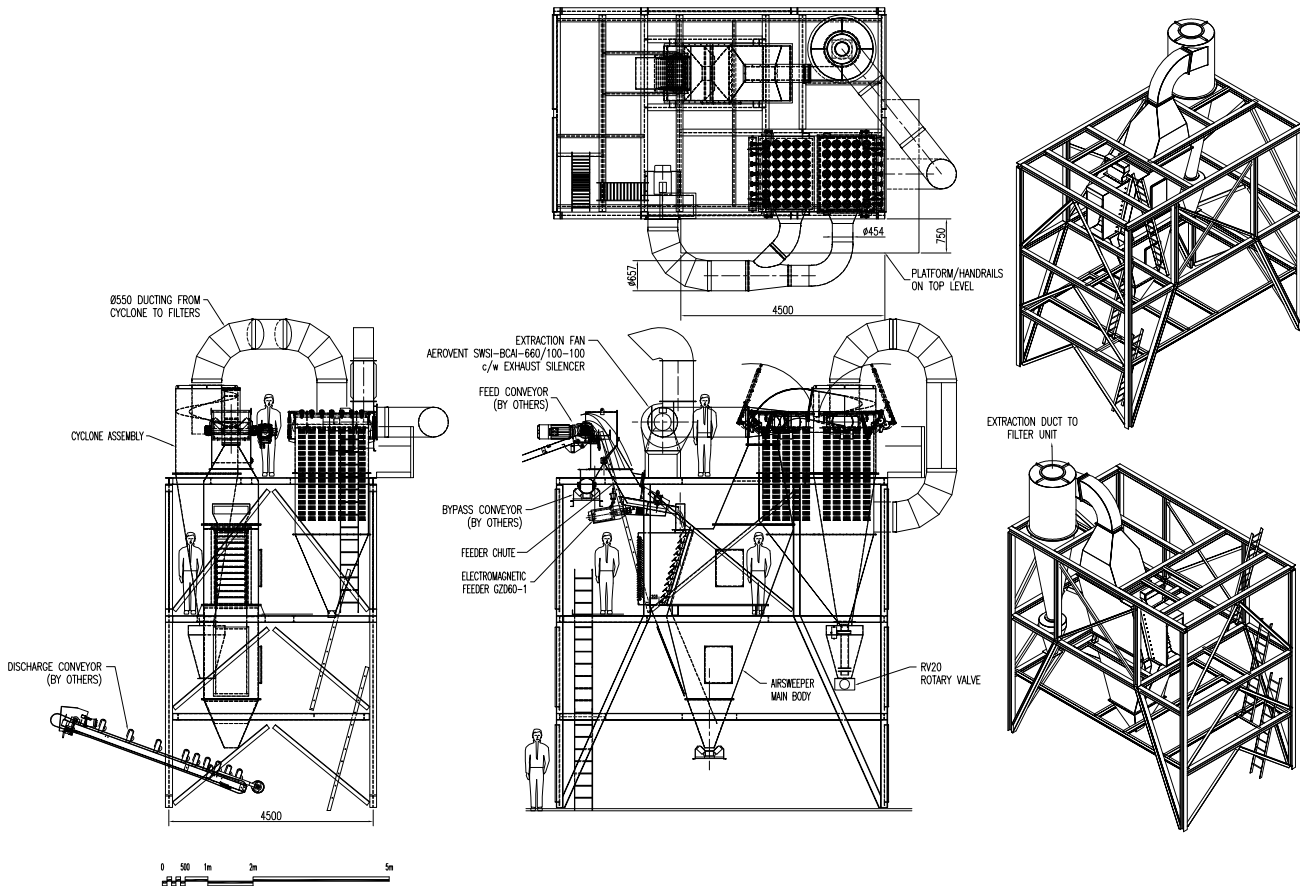

Air classifier – QLD quarry